

Rack-Mounted EPON OLT FD1204S-B0



Product Overview

EPON OLT FD1204S-B0 completely meet relative standards of IEEE 802.3x and FSAN. The equipment is a 1U rack-mounted device, providing 1 USB interface, 4 uplink GE ports, 4 uplink SFP ports, 2 10-gigabit uplink ports and 4 EPON ports. Single port supports 1:64 splitting ratio. System support 256 EPON terminals accessing in for the most.

This product meets the requirements in device performance and size of compact server room as the product has high performance and compact size, is convenient and flexible to use, and is easy to deploy as well. Moreover, the product meets the requirements of promoting network performance, improving reliability and reducing power consumption in the perspective of access network and enterprise network and is applicable to three-in-one broadcast television network, FTTP (Fiber to the premise), video monitoring network, enterprise LAN (Local Area Network), internet of things and other network applications with a very high price/performance ratio.

Features

- **Meet IEEE 802.3x standard and relative EPON standards of Chinese Communication Industry**
- **Support OAM remote management for ONT/ONU, compatible with IEEE 802.3x OAM Protocol**
- **1U height 8PON OLT product in compact design of Pizza-Box**
- **Layer 2 Switching Function**

OLT equips with very powerful layer 2 Full Wire Speed Switching and completely supports layer 2 protocol. OLT supports varieties of layer 2 functions like TRUNK, VLAN, rate limit, port isolate, queue technology, flow control technology, ACL and so on, which provides technical guarantee for the development of multi-service integrated.

- **QoS Guarantee**

It can provide various QoS for EPON system, which can meet different QoS requirements for



delay, jitter, and packet loss rate of different service flows.

- **Easy-to-Use Management System**

Support management method of CLI, WEB, SNMP, TELNET, SSH and meet OAM standard, through OAM channel protocol service management can be realized, including ONT function parameter set, Qos parameters, configuration information request, performance statistics, auto-reporting of running events in system, configuration for ONT from OLT, fault diagnosis and management of performance and safety.


Product Specification

Item		FD1204S-B0
Chassis	Rack	1U 19 inch standard box
Uplink Port	QTY	10
	Copper	10/100/1000M auto-negotiable,RJ45:4pcs
	Optical interface	4 GE
	10Gb uplink interface	2*10Gb
PON Port	QTY	4
	Physical Interface	SFP Slots
	Connector Type	1000BASE-PX20+
	Max splitting ratio	1:64
USB Port	QTY	1
	Connector Type	Type-C
Management Ports		1 100/1000 BASE-Tx out-band Ethernet port 1 CONSOLE local management port
PON Port Specification (Apply to C-Data PON module)	Transmission Distance	20KM
	PON port speed	Symmetrical 1.25Gbps
	Wavelength	1490nm TX,1310nm RX
	Connector	SC/PC
	Fiber Type	9/125μm SMF
	TX Power	+2.5~+7dBm
	Rx Sensitivity	-27dBm
Saturation Optical Power	-6dBm	
10Gb SFP+ Port Specification (Apply to C-Data 10Gb module)	Transmission Distance	10KM
	PON port speed	8.5-10.51875Gbps
	Wavelength	1310nmTX, 1310nmRX
	Connector	LC
	Fiber Type	Single mode with dual fiber
	TX Power	-8.2~+0.5 dBm
Rx Sensitivity	-12.6dBm	
Management Mode		SNMP, Telnet, CLI management mode.
Management Function		Fan Group Detecting Port Status monitoring and configuration management;



		<p>Layer-2 switch configuration such as Vlan, Trunk ,RSTP,IGMP ,QOS, etc; EPON management function: DBA ,ONU authorization, ACL ,QOS ,etc; Online ONU configuration and management User management Alarm management</p>
Layer-two Switch		<p>Support port Vlan and protocol Vlan Support Vlan tag/Untag ,vlan transparent transmission; Support 4096 VLAN Support 802.3dd trunk RSTP QOS based on port ,VID,TOS and MAC address IGMP Snooping 802.x flow control Port stability statistic and monitoring</p>
EPON Function		<p>Support port-based rate limitation and bandwidth control; In compliant with IEEE802.3ah Standard Up to 20KM transmission Distance Support data encryption, group broadcasting, port Vlan separation, RSTP, etc. Support Dynamic Bandwidth Allocation (DBA) Support ONU auto-discovery/Link detection/remote upgrade of software; Support VLAN division and user separation to avoid broadcast storm; Support various LLID configuration and single LLID configuration .Different user and different service could provide different QoS by means of different LLID channels. Support power-off alarm function ,easy for link problem detection Support broadcasting storm resistance function Support port isolation between different ports Support ACL and SNMP to configure data packet filter flexibly Specialized design for system breakdown prevention to maintain stable system Support dynamic distance calculation on EMS online Support RSTP,IGMP Proxy</p>
Layer-three Route		<p>Support static routing protocol Support dynamic RIP protocol Support dhcp-relay function Support vlanif interface configuration</p>
Backplane Bandwidth		58G
Size		440mm(L)*230mm(W)*44mm(H)
Weight		4kg
Power Supply	220VAC	AC: 100V~240V, 50/60Hz
	-48DC	DC: -40V~-72V
Power Consumption		60W
Operating Environment	Working Temperature	-15~50℃
	Storage Temperature	-40~85℃
	Relative Humidity	5~90%(non-condensing)

Typical Application

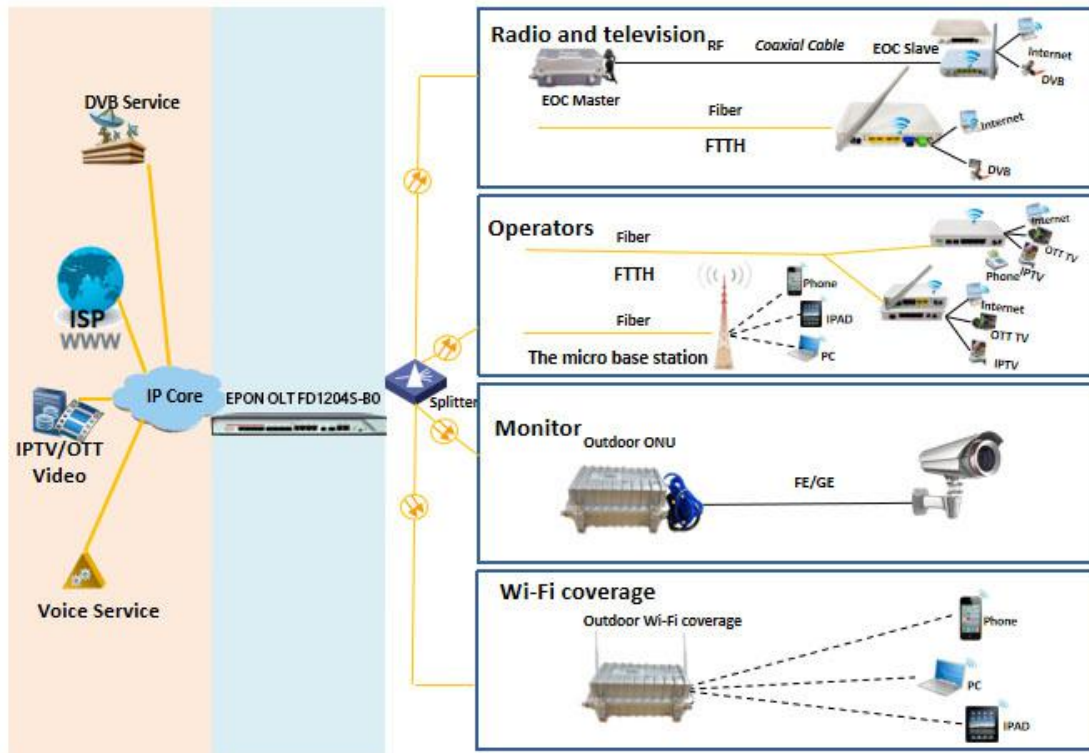

Ordering Information

Product Name	Model	Product Description
Standalone OLT	FD1204S-B0-①② Example: FD1204S-B0-NDA	<p>1 U standalone EPON OLT with 4 PON ports, 1 USB interface, 4 uplink COMBO ports, 2 uplink 10-gigabit optical ports and power supply of 220VAC / -48VDC, support dual power redundancy configuration</p> <p>①:BBU key. N-without BBU; B-with BBU</p> <p>②:Power key. SA-single AC; DA-double AC; SD-single DC; DD-double DC; DX-single AC and single DC</p>