

FD511T-R460

10GE XGSPON ONU



High Speed CPU



Low Power Consumption




Software Customization



Optional Shell Supply

Brief Views


FD511T-R460 is an indoor fiber broadband access terminal. It can be used in connection with our company FD16 /17series GPON OLT or FD12 / 13 series EPON OLT. It can also interconnect with the mainstream manufacture (Huawei / ZTE / Fiberhome) GPON or EPON OLT to provide users with Internet service based on GPON and EPON technology.

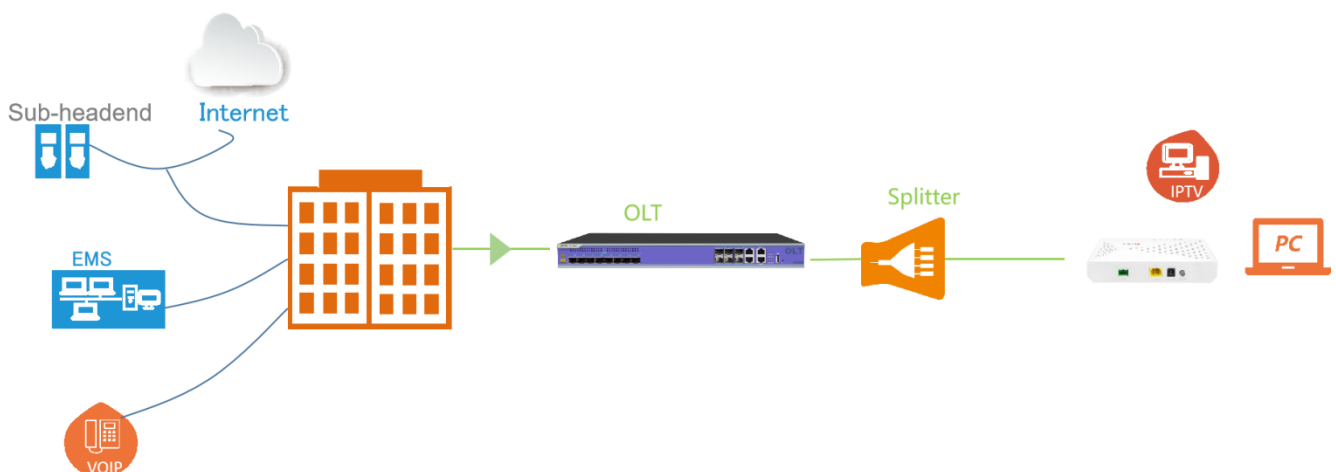

Functional Feature

- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support SN and LOID+Password multiple registration methods
- Support port VLAN configuration
- Support port-based rate limitation and bandwidth control
- Support port flow-control
- Support MAC address learning
- Support MAC address learning account limit
- Support broadcasting storm resistance function
- Support Dynamic Bandwidth Allocation (DBA)
- Support AES encryption and decryption
- EMS network management based on SNMP ,convenient for maintenance
- Support power-off alarm function ,easy for link problem detection
- Support Firewall
- Support MAC address/URL filter
- Support Remote WEB/Telnet access control

Product Interface and LED

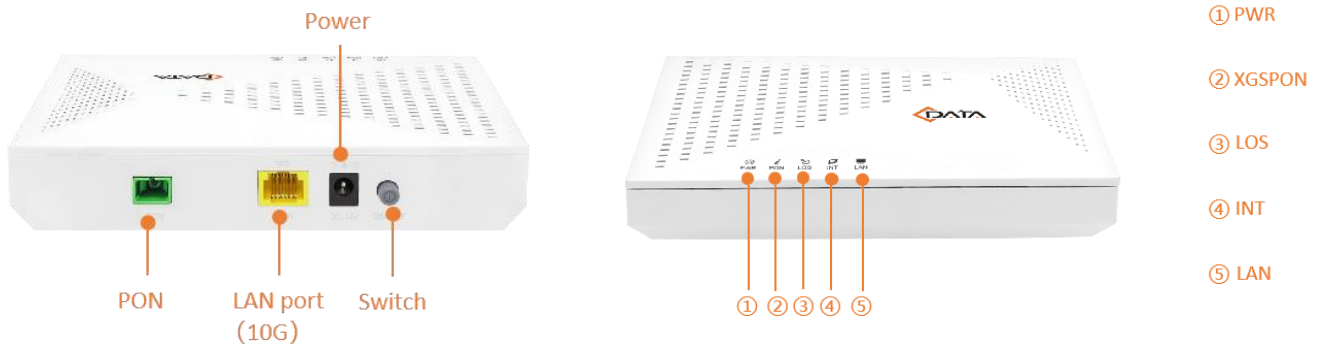

LED Definitions

Indicator		Description
PWR	Power status	On: The ONT is power on; Off: The ONT is Power off;
XGSPON	ONT Register	On: Success to register to OLT; Blinking: In process of registering to OLT; Off:Failed to register to OLT or no normal optical signal input;
LOS	PON optical signals	On: Optical power lower than receiver sensitivity; Off: Optical in normal;

LAN	LAN port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
INT	Internet status indicator	On: The routed WAN Internet access service is normal. Off: The routed WAN Internet access service is abnormal.

Product Specification

Mechanics

Dimensions	160mm(L)*112mm(W)*32mm(H)
Weight	About 200g

Hardware

User Port (LAN)		RJ-45 connector	
		10GE	
		Full/half duplex	
		Auto MDI/MDI-X	
Indicators		PWR / PON / LOS / LAN / INT	
PON Port	PON Mode	XGSPON: FSAN G.9807.1 standard	
	PON Rate	XGSPON: 10Gbps/10Gbps downstream/upstream	
	Wavelength	Transmit: 1270nm	Receiver: 1577nm
	Receiving sensitivity	XGSPON: -28dBm	
	Saturated power	XGSPON: -9dBm	
	Average sending	XGSPON: +4~+9dBm	

Environment

Working temperature	0 to 40° C
Operating humidity	10% ~ 90% (Non-condensing)

Power

External 12VDC/1A power supply adapter	
Power consumption	<6W

Copyright © Shenzhen C-Data Technology Co., Ltd. 2023. All rights reserved.

Without the prior written consent of C-DATA, any reproduction, excerpting, backup, modification, translation or any other form of commercial use of this document or any portion of this document, and in any form or by any means, to transmit the document are prohibited.