

FD1700S



Dedicated Chip



Modular




Back Battery Unit



Layer3 Switching

Brief Views

The GPON OLT FD1700S fully complies with the relevant standards of ITU G.984.x and FSAN. It's a 1RU device featuring an uplink SFP port with options for either 4*1G/10G and 4*10G/25G. The PON ports come in configurations of 4/8/16 ports. Each GPON port supports a splitting ratio of 1:128. Consequently, the GPON system can accommodate up to 4096 terminal connections, depending on the number of PON ports chosen.

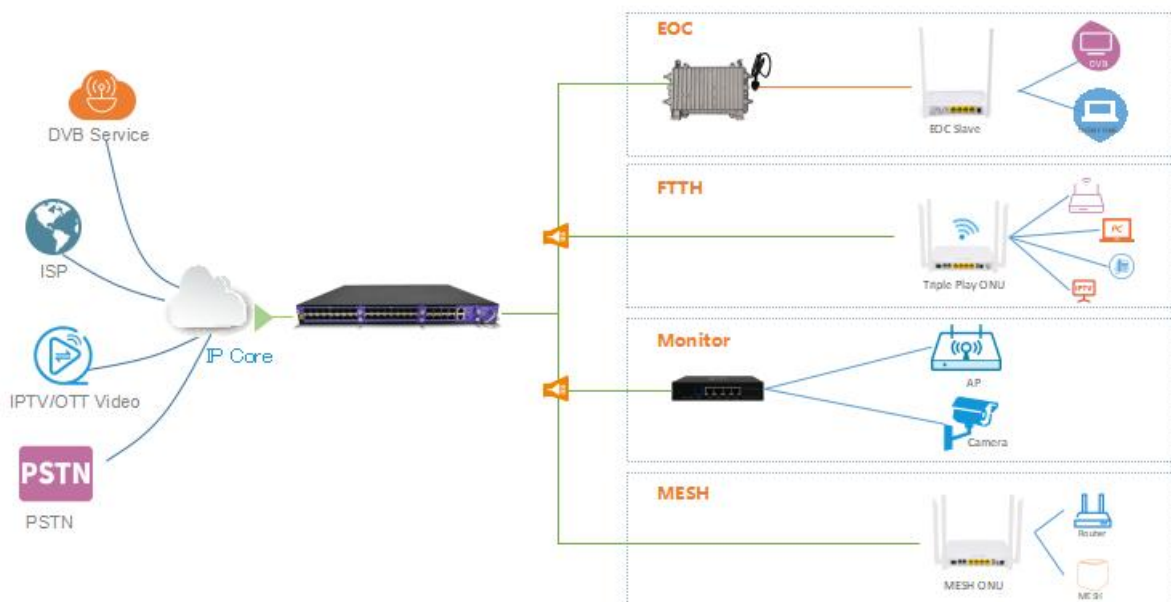

Functional Feature

GPON Function

- ITU-T G.984/G.988 standard
- Support OMCI protocol
- T-CONT DBA
- GEMPORT traffic
- ONU auto discover
- Ranging function
- Downstream data encrypted

Layer 2 Switching Function

- Access/Trunk/Hybrid L2 access mode
- Support 64K MAC address
- Support 4094 VLANs
- VLAN filter function,VLAN transform
- Smart QinQ
- L2 port mirror
- Support 1024 static MAC address
- MAC address learning/aging
- MAC address limitation
- Static/Dynamic LACP
- ACL
- RSTP

Layer 3 Switching Function

- Static routing
- DHCP server/DHCP relay/DHCP snooping
- ARP proxy

Multicast Function

- IGMP snooping
- IGMP V1/V2/V3
- Multicast VLAN translation
- Multicast QOS
- IGMP protocol statistics

QOS Guarantee

- Traffic control function
- Congestion avoidance function
- Queue scheduling function
- COS Priority function
- ACL function

Reliability Function

- 1+1 power modules
- BBU optional
- Fan speed automatically adjusts based on temperature
- Enables manual adjustment for primary and secondary power sources


Management Function

- CLI/WEB/Telnet/SSH
- Performance Management
- Alarm Management
- Security Management

Maintenance Function

- Device log
- Device upgrade
- Fault diagnose function
- Condition monitoring function

Product Interface

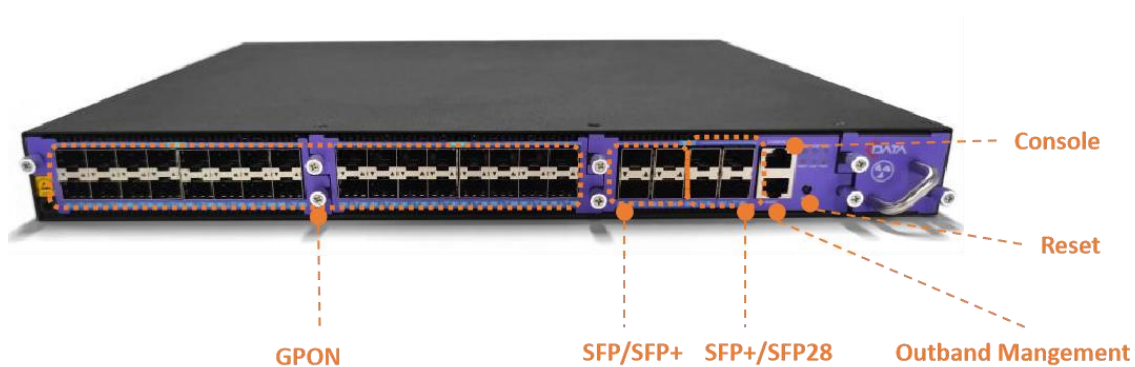

Product Specification

Mechanics

Management Rack	1U 19-inch standard box
Dimensions	440*375*44mm
Weight	About 6kg

Hardware

Uplink Port	4*1G(SFP)/10G SFP+ 4*10G(SFP+)/25G(SFP28)	
PON Port	Quantity	4*GPON/8*GPON/16*GPON/8*XG(S)PON
	Physical interface	SFP slot
	Interface type	GPON: ITU-TG.984.2 Class B+/Class C+
	Max splitting ratio	GPON: 1:128
Management Port	1 100/1000BASE-Tx out-band Ethernet port 1 CONSOLE local management port	
PON Port attribute	Transmission distance	20KM
	Port rate	GPON: Downstream: 2.5Gbps Upstream: 1.25Gbps
	Wavelength	Forwarding: 1490nm Receiving: 1310nm
	Interface type	SC/UPC
	Fiber type	9/125μm SMF (Single Mode Fiber)
	Light transmission power	Class B+: +1.5 ~ +5dBm Class C+: +3 ~ +7dBm
	Receiving sensitivity	Class B+: -28dBm Class C+: -30dBm
	Saturation power	Class B+: -8dBm Class C+: -12dBm
Backplane Bandwidth	400G	

Power Supply

AC	100V ~ 240V, 47~63Hz
DC	-40V ~ -72V

Environment

Working temperature	-15 ~ 50°C
Storage temperature	-40 ~ 85°C
Ambient humidity	5 ~ 90% (Non-condensing)

Copyright © Shenzhen C-Data Technology Co., Ltd. 2023. All rights reserved.

Without the prior written consent of C-DATA, any reproduction, excerpting, backup, modification, translation or any other form of commercial use of this document or any portion of this document, and in any form or by any means, to transmit the document are prohibited.